


DS-90SS528 DC GEAR MOTOR Series **DongShun**




Main voltage: 3VDC, 6VDC, 9VDC, 12VDC, 24VDC.

Typical applications: Welding machine, Garbage disposers, Coffee machine, Mimeograph, Manostat, Paper shredder, Card conveyors, Central air-conditioning valve, Office equipment, Household appliances, Automatic actuator.

Weight: 350~400g/pcs (approx)

Packing details: CTN size: 55X35XH18cm 24pcs/CTN G.W. 11Kgs

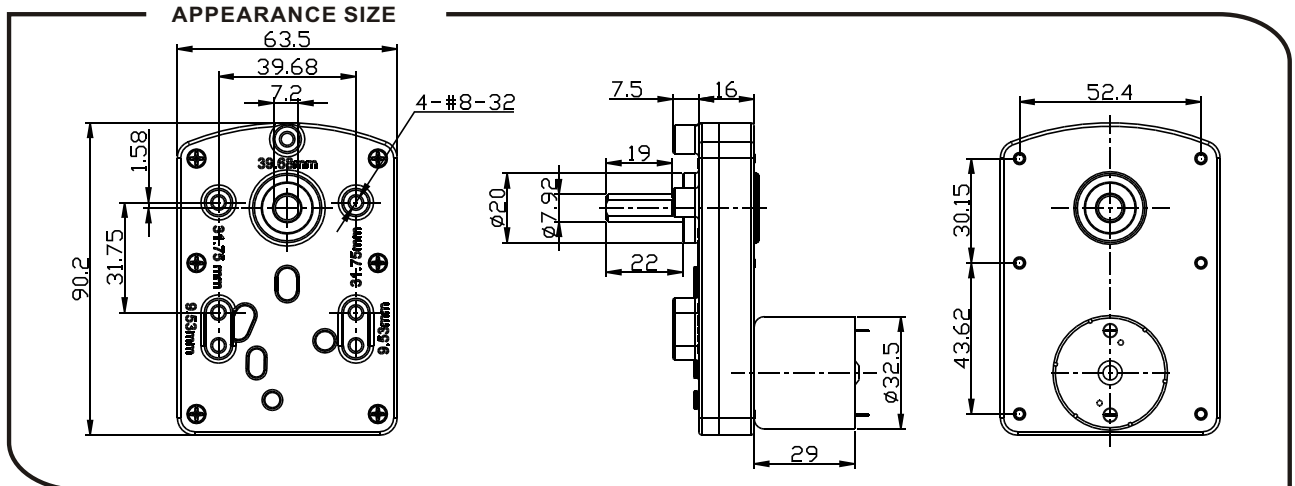

Gearbox data:

Number of stages	3 stages reduction	4 stages reduction	5 stages reduction
Reduction ratio	36, 66, 94	129, 139, 155, 196, 219, 277	322, 392, 456, 555, 833
Max. Running torque	30Kgf · cm	40Kgf · cm	50Kgf · cm
Max. Gear breaking torque	90Kgf · cm	120Kgf · cm	150Kgf · cm
Max. Gearing efficiency	73%	65%	59%

Other reduction ratio please telephone or e-mail to our engineering department.

Motor data:

Motor name	Rated Volt. V	No load		Load torque				Stall torque	
		Current	Speed	Current	Speed	Torque	Output power	Torque	Current
		mA	r/min	mA	r/min	gf · cm	W	gf · cm	mA
DS-528123400	12	≤40	3400	≤180	2500	40	1.0	160	720
DS-528124500	12	≤60	4500	≤350	3300	60	2.0	210	1400
DS-528126000	12	≤70	6000	≤720	4500	80	3.6	300	2800
DS-528243000	24	≤15	3000	≤80	2200	40	0.9	140	320
DS-528244500	24	≤25	4500	≤180	3300	60	2.0	210	730
DS-528246700	24	≤45	6700	≤360	4500	80	3.6	300	1400

1. This table lists some motors parameters, others please refer to specific parameters of Page 146.

2. After connecting motor and gearbox which is named gearmotor the output torque: motor torque X reduction ratio X gearing efficiency; output speed: motor speed / reduction ratio.

NOTE:

- Gearmotor named methods: e.g. DS-90SS528123400-94K Motor please refer to the motor data DS-528123400. Gearbox please refer to gearbox data reduction ratio 94. Related to gearmotor output speed and torque please refer to motor data.
- Motor can be installed with magnetic encoder, encoder parameters please refer to Page 140.
- Gearbox shell material: zinc alloy.
- Gearbox gear materials: The first stage gear: plastic gear. The final stage gear: 45# steel Heat-treatment gear. Other stages gear: powder metallurgy gear.
- Standard output shaft after reducing: 8.0mm. other sizes of the output shaft can make as client request.
- Chart only for reference, products shall prevail the entity.