


WEIGHT:1.7g(APPROX)

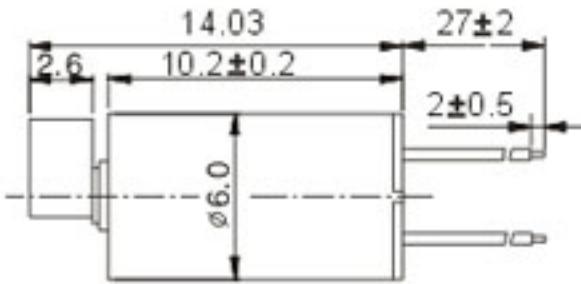

6SL

型号	额定电压	起动电压	使用电压范围	起动电流	额定电流	回转数	耐电压	机械噪音①	动转寿命②
MODEL	Rated voltage	Starting voltage	Operating voltage	Starting current	Rated load current	Rated load speed	Voltage resistance	Mechanical noise	Operation life
	V(DC)	V(DC)	V(DC)	mA	mA	rpm	V(DC)	db	(Cycle)
4CL	1.3	≤ 0.7	0.7~1.6	≤ 150	75	9000 ± 1500	250	<50	≥ 20000
6A	1.3	≤ 0.8	1.0~1.9	≤ 150	65	19850 ± 1500	250	<50	≥ 20000
6CL	1.3	≤ 0.7	0.7~1.6	≤ 150	75	8000 ± 1500	250	<50	≥ 20000
6DH	1.3	≤ 0.7	0.7~1.6	≤ 150	75	8000 ± 1500	250	<50	≥ 20000
6SL	1.3	≤ 0.7	0.7~1.6	≤ 150	75	8000 ± 1500	250	<50	≥ 20000
6DL	1.3	≤ 0.8	0.8~1.6	≤ 150	90	9000 ± 1500	250	<50	≥ 20000
7AL	1.3	≤ 0.7	0.7~1.6	≤ 150	75	7000 ± 1500	250	<50	≥ 20000
12B	3.0	≤ 1.5	1.6~3.6	≤ 150	75	7200 ± 1500	250	<50	≥ 20000